




Head angle



Changing Batteries



Helmet mount

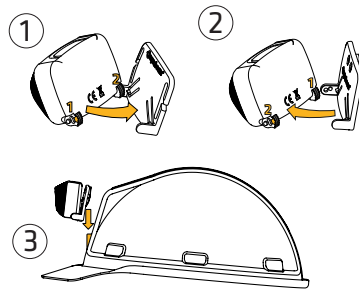

*Helmet mount is sold seperately

Additional online information



Warning



Eye Safety

Risk Group 2
(IEC 62471)




Specifications



3xAAA



85 m



IP 68



145 g

Light Control Functions

TOP BUTTON



CLICK




ON = MEDIUM/LAST USED LEVEL

CLICK



PUSH




OFF

BOTTOM BUTTON



CLICK

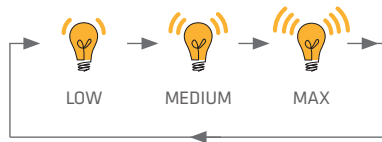

BOTH BUTTONS



PRESS AND RELEASE

BATTERY LEVEL



0.3 SEC - 3 SEC



x1



0-20 %



x2



20-40 %



x3



40-60 %



x4



60-80 %



x5



80-100 %

TRANSPORTATION
LOCK



3 SEC - 9 SEC

